

MiBoxer 2.4GHz IC LED Streifen Digital SPI Controller Empfänger SPIR3



Digital LED Streifen IC und SPI Leuchten Controller

Passende IC Streifen: Single Color, RGB, RGBW Digitale Strips

Compatible chips(controller don't need to set chip types)

TM1809, TM1804, TM1812, SK6813, UCS1903, UCS1909, UCS1912,

UCS2903, UCS2909, UCS2912, WS2811, WS2812, WS2813, WS2815

SK6812(RGBW), WS2813(RGBW), WS2814(RGBW)

Artikel: SPIR3-M

Input : 5V-24V DC

Max. Output: 6A / 30-144W

Output signal: SPI(TTL) 800Kbs

Pixel Dots: Single Color (2048), RGB (1536), RGBW (1024)

Dimming Range: 0.1%-100%

Frequenz : 2,4 GHz Radiofunk

Empfang : 30m


Zertifikate:

EMC Standard (EMC): ETSI EN 301 489-1 V2.2.3

ETSI EN 301 489-17 V3.2.4

Safety Standard (LVD): EN 62368-1; 2020+A11;2020

Radio Equipment (RED): ETSI EN 300 440 V2.2.1

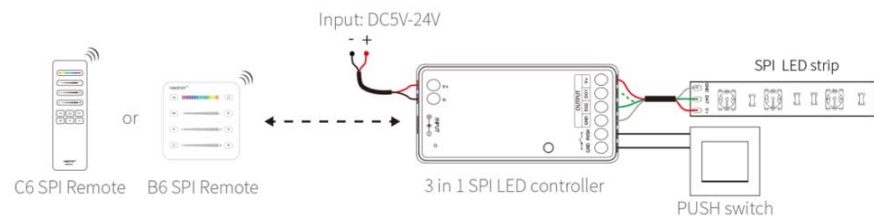

<https://ledplanet.at/miboxer-digitale-streifen-controller-spi-strips-spir3>